

RUBBERDEX® XTREME



RUBBERDEX XTREME is the latest addition to our RUBBERDEX line of media. Designed with a 3/8" steel plate backing instead of a traditional insert, RUBBERDEX XTREME provides significantly extended service life compared to traditional modular media. Designed for heavily loaded or highly abrasive applications, this product is ideal for combatting panel margin separation and excels under heavy impact conditions where a mixture of large rocks and fines are processed.

HOW IT HELPS YOUR PLANT

Prevents panel margin separations from fines being impacted into seams.

Provides bolt-down media level protection in easy-to handle modular form.

Extends maintenance cycles and simplifies changeouts.

APPLICATION FIT

Scalping applications
Secondary sizing applications

PRODUCT FEATURES

1' x 2' panel size for easy changeouts Available panel thicknesses ranging from 2" – 4" Fits most stringer systems, including angle and tube

Up to 30% more wear life than typical modular media 3/8" (0.375") Gr50 steel plate backing


Available in 35mm aperture size and up





RUBBERDEX® XTREME

PANEL STYLES

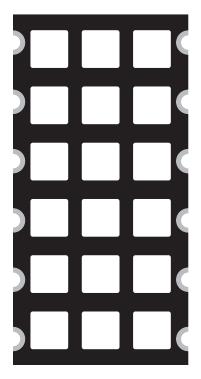

Priority: Extended Wear Life

FXR100

Aperture Size Range: 1.3" and higher (35mm and higher)

PANEL SIZE

1'x2'

PANEL THICKNESS

2" - 4"

50.8mm - 101.6mm

MATERIAL OPTIONS

XR FXR XR100 XR200

FASTENING OPTIONS

Bolt-Down Pin & Sleeve

STEEL DETAILS


Steel Type: Gr50

Steel Thickness: 0.375"


APERTURE OPTIONS




Solid



Square



Slotted



Round

1790 Dewberry Road Spartanburg, SC 29307 **Call:** +1 864 579 4594 Camino La Vara 03400 San Bernardo, Santiago, Chile 8060123 **Sales:** +56 2 23801319

Polydeck Peru S.R.L.

Calle Jacinto Ibanez Nro. 315 Urb. Parque Industrial Arequipa -Megacentro Almacen D-112a, D112b

Sales: +519 4596 6996