



POLYDECK®

METALDEX® XPT



Contact us for pricing or additional information.

Our welded wire media is specially engineered to give wire cloth level throughput in easy-to-handle modular form. METALDEX XPT allows for fast and easy changeouts, needs minimal downtime for maintenance, and wears significantly longer than typical side tension wire cloth.

APPLICATION FIT


- Dry sizing applications with aggressive wear.
- Heavily loaded applications with higher screening efficiency needs.
- Coarse sizing applications where weight restrictions may not allow heavier molded panels.

PRODUCT FEATURES

- 1' x 2' modular design.
- Abrasion-resistant welded wire.
- Secure, polyurethane encasement for welded wire sections.
- 30mm and 65mm panel thickness options.
- Available in "With Flow" and "Across Flow" configurations.

FASTENING OPTIONS

Pin

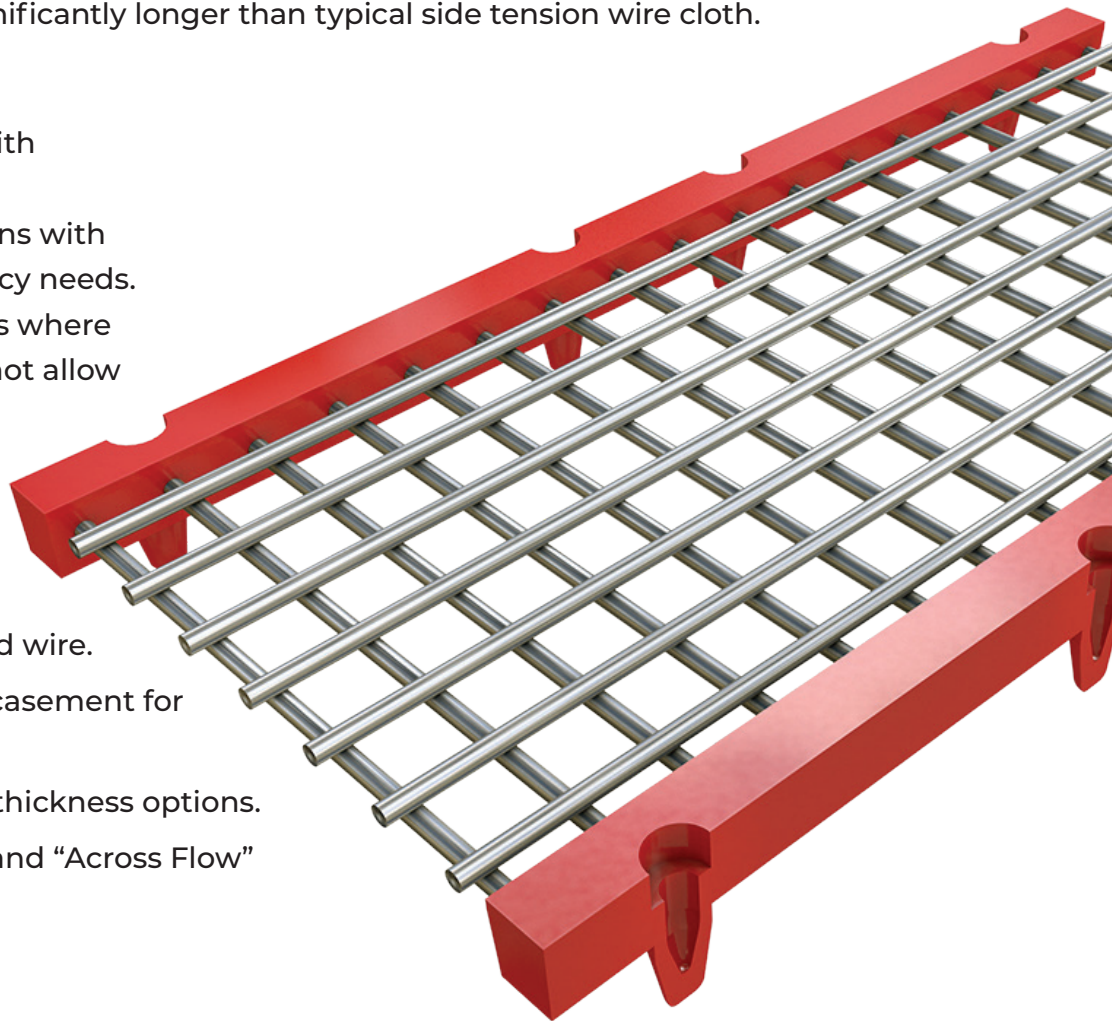




POLYDECK®

METALDEX® XPT


Modular welded wire. Open area comparable to wire cloth.

Available in “with flow” or “across flow” configurations.

XPT

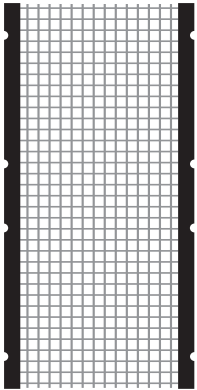


Opening	Wire Diameter	Open Area	Lateral Wire Across Flow	Longitudinal Wire w/ Flow
1/2"	3/16"	44.4%	MW050RC21A	MW050SC21A
9/16"	1/4"	38.2%	M056RC26B	M056SC26B
3/4"	1/4"	45.9%	M075RC26B	M075SC26B
7/8"	1/4"	49.0%	M088RC26B	M088SC26B
1"	5/16"	50.0%	M100RC26C	M100SC26C
1-1/8"	5/16"	49.2%	M113RC26C	M113SC26C
1-1/4"	5/16"	48.8%	M125RC26C	M125SC26C
1-1/2"	3/8"	49.6%	M150RC26D	M150SC26D
1-3/4"	3/8"	55.9%	M175RC26D	M175SC26D
2"	3/8"	55.6%	M200RC26D	M200SC26D
2-1/4"	3/8"	59.8%	M225RC26D	M225SC26D
2-1/2"	3/8"	60.4%	M250RC26D	M250SC26D
3"	1/2"	63.8%	M300RC26E	M300SC26E

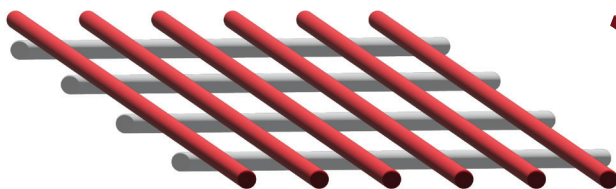


Longitudinal Wire With Flow



FLOW

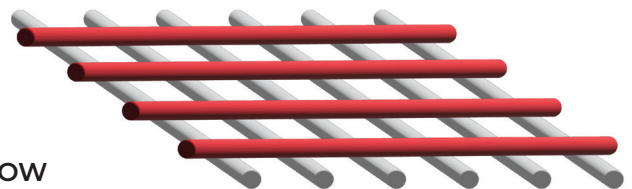

Lateral Wire Across Flow

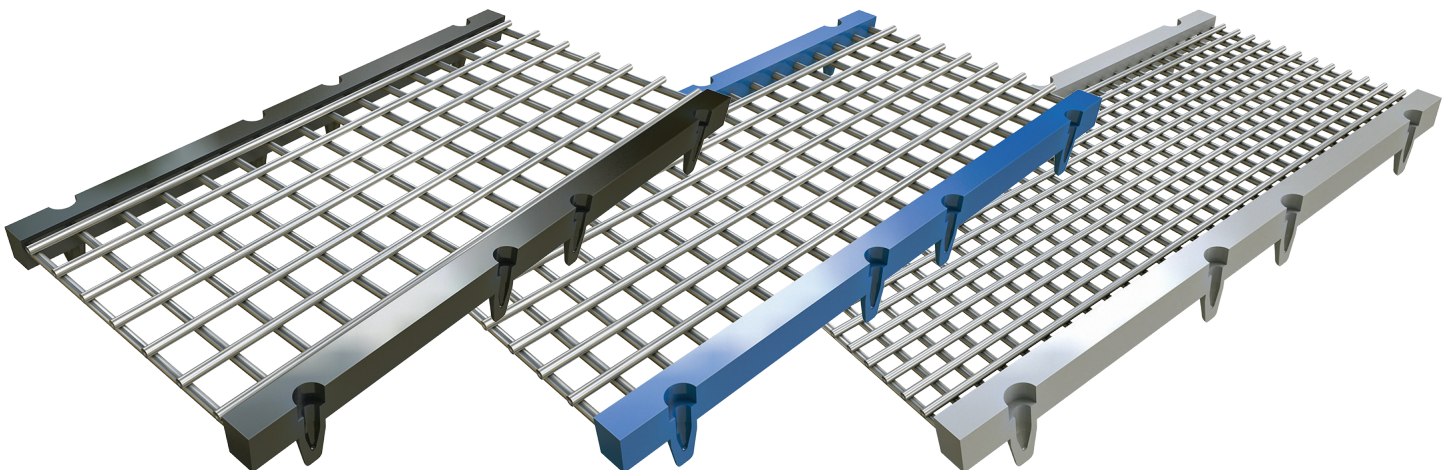

Corporate Headquarters

1790 Dewberry Road
Spartanburg, SC 29307
Call: +1 864 579 4594

Polydeck Chile, Ltda.

Camino La Vara 03400
San Bernardo, Santiago, Chile 8060123
Sales: +56 2 23801319

Polydeck Peru S.R.L.

Calle Jacinto Ibanez Nro. 315
Urb. Parque Industrial Arequipa -
Megacentro Almacen D-112a, D112b
Sales: +519 4596 6996

polydeck.com