



Contact us for pricing or additional information.

Our welded wire media is specially engineered to give wire cloth level throughput in easy-to-handle modular form. METALDEX XPT allows for fast and easy changeouts, needs minimal downtime for maintenance, and wears significantly longer than typical side tension wire cloth.

APPLICATION FIT


- Dry sizing applications with aggressive wear.
- Heavily loaded applications with higher screening efficiency needs.
- Coarse sizing applications where weight restrictions may not allow heavier molded panels.

PRODUCT FEATURES

- 1' x 2' modular design.
- Abrasion-resistant welded wire.
- Secure, polyurethane encasement for welded wire sections.
- 30mm and 65mm panel thickness options.
- Available in "With Flow" and "Across Flow" configurations.

FASTENING OPTIONS


Pin

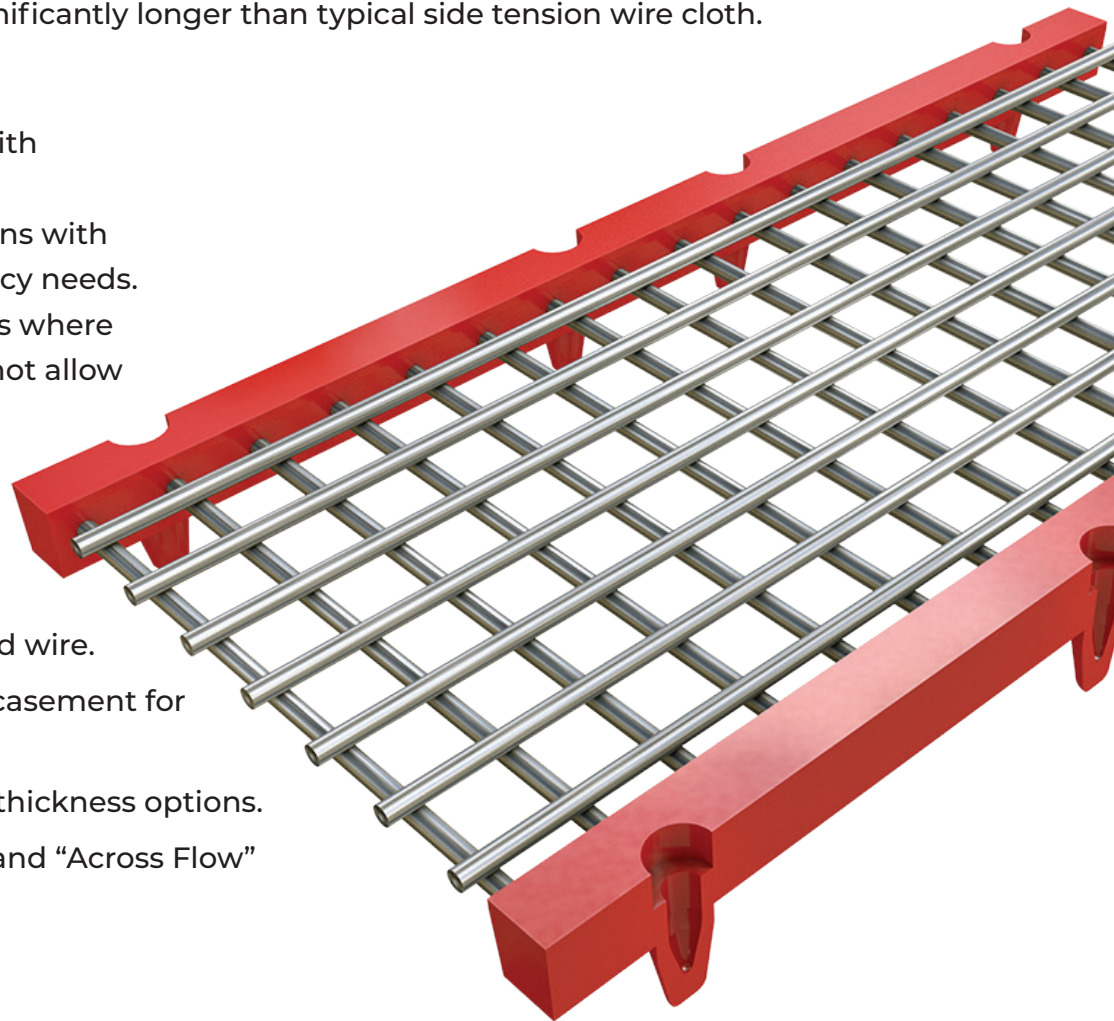




Modular welded wire. Open area comparable to wire cloth.
Available in “with flow” or “across flow” configurations.

XPT

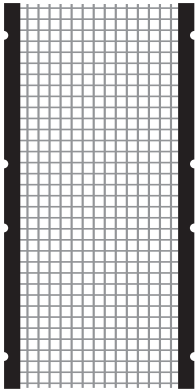


Opening	Wire Diameter	Open Area	Lateral Wire Across Flow	Longitudinal Wire w/ Flow
1/2"	3/16"	44.7%	M050RC26A	M050SC26A
9/16"	1/4"	38.2%	M056RC26B	M056SC26B
5/8"	1/4"	42.9%	M063RC26B	M063SC26B
3/4"	1/4"	45.9%	M075RC26B	M075SC26B
7/8"	1/4"	49.0%	M088RC26B	M088SC26B
1"	5/16"	50.0%	M100RC26C	M100SC26C
1-1/8"	5/16"	49.2%	M113RC26C	M113SC26C
1-1/4"	5/16"	48.8%	M125RC26C	M125SC26C
1-1/2"	3/8"	49.6%	M150RC26D	M150SC26D
1-3/4"	3/8"	55.9%	M175RC26D	M175SC26D
2"	3/8"	55.6%	M200RC26D	M200SC26D
2-1/4"	3/8"	59.8%	M225RC26D	M225SC26D
2-1/2"	3/8"	60.4%	M250RC26D	M250SC26D
3"	1/2"	64.1%	M300RC26E	M300SC26E

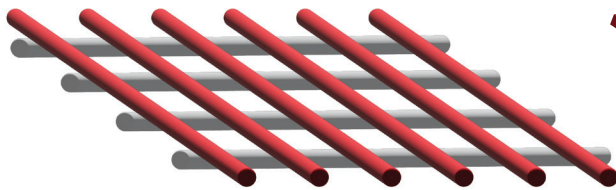


Longitudinal Wire With Flow



FLOW

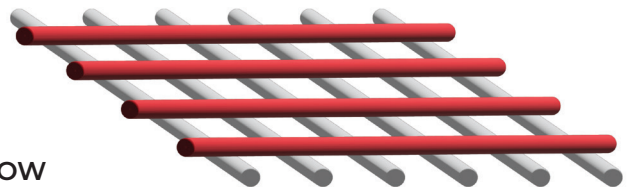

Lateral Wire Across Flow

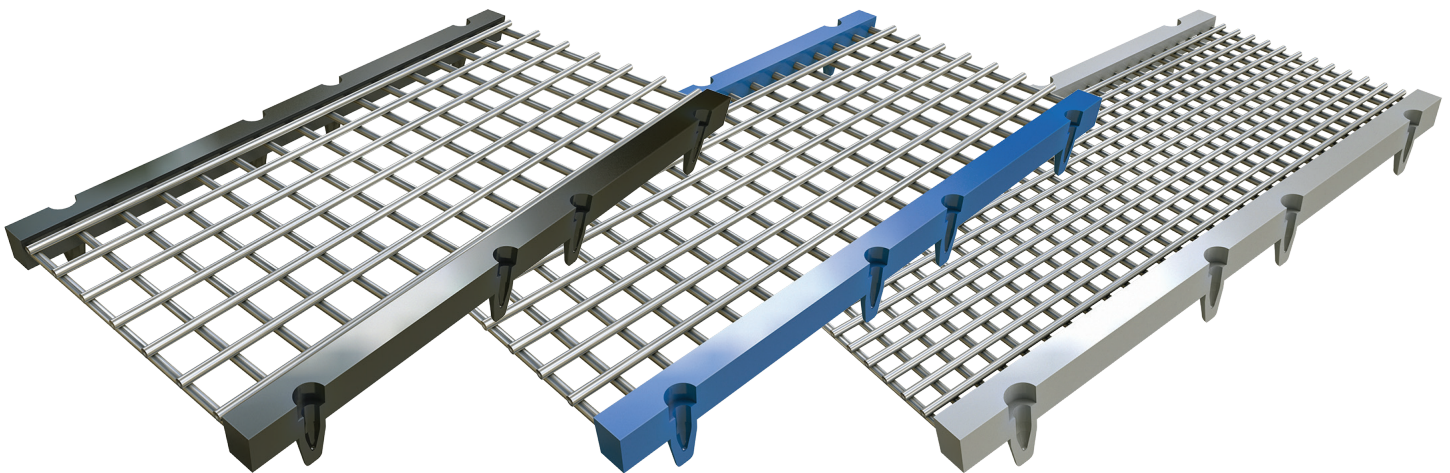

Corporate Headquarters
1790 Dewberry Road
Spartanburg, SC 29307
Call: +1 864 579 4594

Polydeck Chile, Ltda.
Camino La Vara 03400
San Bernardo, Santiago, Chile 8060123
Sales: +56 2 23801319

Polydeck Peru S.R.L.
Calle Jacinto Ibanez Nro. 315
Urb. Parque Industrial Arequipa -
Megacentro Almacen D-112a, D112b
Sales: +519 4596 6996